



World Leader in Rating Technology

## 2016 ORC Club Certificate

### Rating Office

Offshore  
Racing  
Congress



### Certificate

Number **LT2064**  
 Issued On **26/05/2016**  
 ORC Ref **ltu00000349**  
 VPP Ver. **2016 1.01**  
 Valid until **31/12/2016**

### Crew Weight

Declared	<b>390kg</b>
Default*	<b>315kg</b>
Non Manual Pwr	<b>No</b>

### Special Scoring

	ToD	ToT
Non Spin GPH	<b>745.5</b>	<b>0.8048</b>
Non Spin OSN	<b>722.2</b>	<b>0.8308</b>
N/S Perf. Line	<b>44.8</b>	<b>0.571</b>

### Sails Limitations

Headsails **5** Spinnakers **3**

#### Dacron Sails

**Spinnaker configuration**  
 Symmetric: **Yes** **35.83**  
 Asymmetric: **Yes** **28.47**  
 Flying H/S: **No**  
 Spin. Pole: **Yes**


### Class Division Length

CDL = **6.265**

### Stability

LPS (Estimated): **110.7°**  
 Stability Index: **102.9**  
 OSR Category: **N/A**

### Owner

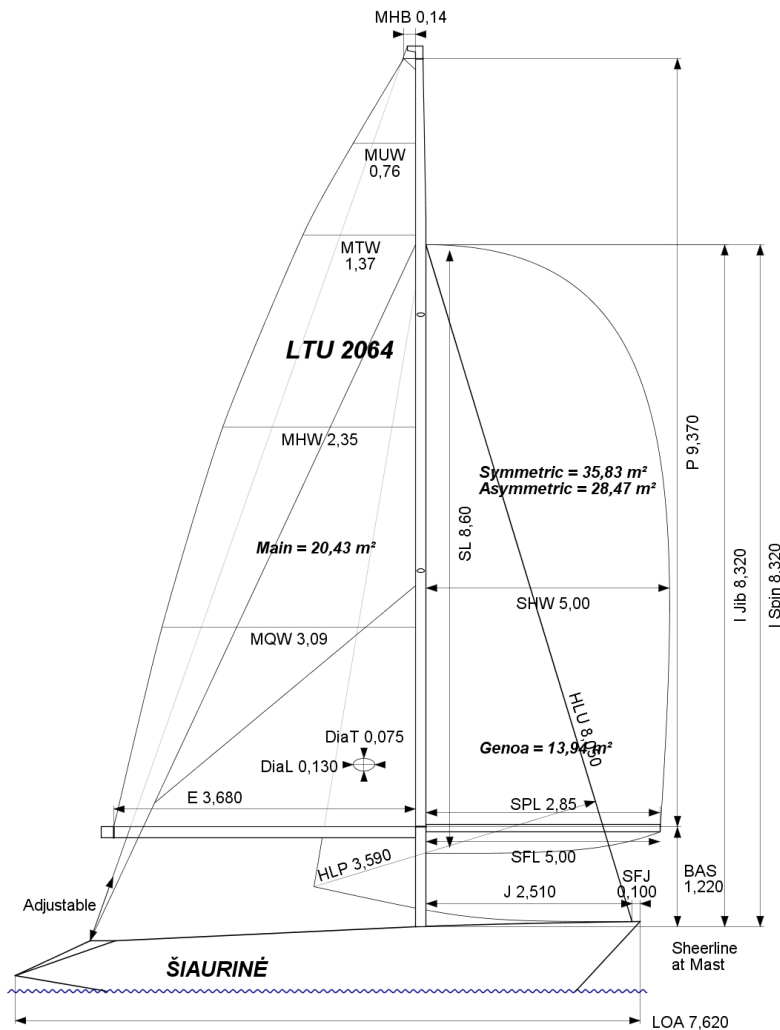

<b>BOAT</b> Name <b>ŠIAURINĖ</b> Sail Nr <b>LTU 2064</b>	<b>GPH</b> <b>720.9</b>	<b>HULL</b> Data File <b>Siaurine_LTU20</b> LOA <b>7.620m</b> Offset File <b>PolaST25.OFF</b> MB <b>2.692m</b> Displacement <b>1,627kg</b> Draft <b>1.599m</b>
<b>CLASS</b> Class <b>ST 25</b> Designer Builder <b>Tallin</b> Series <b>01/1985</b> Age Date <b>05/1991</b> Age Allowance <b>0.487%</b>		IMS Division <b>Cruiser/Racer</b> Dynamic All. <b>0.000%</b> Fwd Accom. <b>No</b> Construction <b>Solid</b> Fiber Rigging <b>No</b> Aramid Core <b>No</b> Crew Arm Ex Carbon Rudder <b>No</b> Light Stanchions
<b>COMMENTS</b>		IMSL <b>6.080m</b> VCGD <b>0.002m</b> Sink <b>8.26kg/mm</b> RL <b>6.449m</b> VCGM <b>0.008m</b> WS <b>10.63m<sup>2</sup></b> LSM0 <b>5.781m</b> Displacement/Length ratio <b>8.4213</b>
<b>PROPELLER</b> Type <b>No Propeller</b>		Water Ballast <b>0</b> Trim Tab <b>No</b>
		<b>CENTERBOARD</b>  <b>N/A</b>
<b>SCORING OPTIONS</b>		
	<b>OFFSHORE</b> COASTAL / LONG DISTANCE	<b>INSHORE</b> WINDWARD / LEEWARD
Time On Distance	<b>701.2</b>	<b>776.7</b>
Time On Time	<b>0.8556</b>	<b>0.8690</b>
Performance Line	PLT <b>0.607</b> PLD <b>57.5</b>	PLT <b>0.784</b> PLD <b>245.0</b>
Triple Number	Low <b>0.8249</b> Medium <b>1.0524</b> High <b>1.1772</b>	Low <b>0.6398</b> Medium <b>0.8654</b> High <b>0.9873</b>